# Continental

Refrigerator

**INNOVATIVE DESIGNS** FOR YOUR FOODSERVICE NEEDS

## **BAR EQUIPMENT**

BOTTLE, KEG & BACK BAR COOLERS, GLASS & PLATE CHILLERS





Continental Refrigerator has been an ENERGY STAR® Partner since 2001

# Tap into our Back Bar Coolers...

Superior performance to keep products COLD.



#### Over 2400+ models and growing...

During this past decade, we've experienced extraordinary growth and change here at Continental Refrigerator, thanks largely to our continued commitment to teamwork, technology-focused product strategies and to our policy of placing customer satisfaction above all else. We've successfully reached key milestones, increased research and development initiatives and achieved significant technological advancements. Even in the face of challenging economic conditions, we're finding new ways to take advantage of the evolving industry landscape to ensure Continental Refrigerator remains your number one choice for commercial refrigeration.

The upcoming years will be exciting as we continue to broaden our business efforts and move from promise to product. We've set increasingly ambitious goals for ourselves, but we have the intense vision and resources to achieve them. We have the knowledge, experience and expertise to bring specialty products to market, and we know the steps we need to

take are simply an extension of what we have been doing successfully since our inception. Simultaneously, we plan to continue responding to market challenges and expand our lines of refrigeration equipment with products boasting enhanced feature sets and ENERGY STAR qualification in order to engage a wider customer base. Consequently, we have set an aggressive timeline for the development of new products to fulfill our commitment to the foodservice industry.



BBC69S-SS-SGD

We take pride in knowing what our customers demand and embrace it as a philosophy for our operations and planning. We know the "real world" operations of commercial kitchens and build that knowledge into every unit we make. That's why we engineer to a higher standard, by testing all our equipment in 100°F, exceeding the standard of 86°F and customizing our standard product line to create flexible solutions for a variety of kitchen applications.

I praise each of our employees for making these past years such an exhilarating success, even in turbulent times. I would also like to extend my thanks to our customers and our suppliers for their unfailing sense of devotion, responsibility, guidance and support.

Your satisfaction is our number one priority!

Sincerely,

Brian P. Kelly President

Brian P. Kelly



Easily removable stainless steel drip grate for cleaning



Single, dual or triple faucet options



Full length, extra large coil and keg line tubing









#### Store and Serve Up Icy, Cold Draft Beer

For your next bar/restaurant design, consider the performance, sustainability and versatility of a Continental Refrigerator Keg Cooler. Built to last with all stainless steel countertop, heavyduty galvanized interior and reinforced stainless steel floor.

- 6 sizes ranging from 24" 90"
- Front breathing air flow (intake/exhaust from the front)
- Standard or shallow depth
- Single, dual or triple faucets
- Modify beer tap columns placement
- Compressor on left (standard) or right (option)







#### Overview of Keg Coolers

# Widths 24" 50" 59" 90"

Side View (Shallow Depth not available on KC24 models)

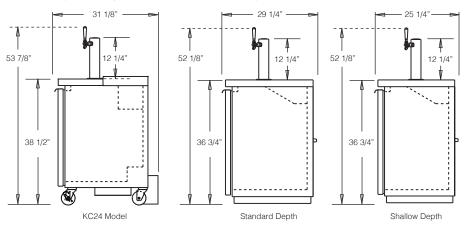

Keg Capacities (standard depth, 1/2 keg straight wall capacities shown, SW = straight wall, B = barrel)

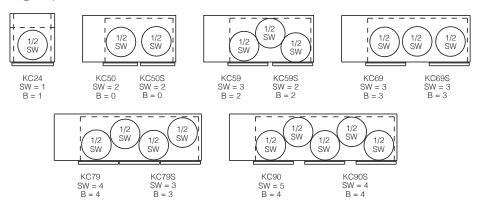

#### Standard Features

Performance-rated, **front breathing** refrigeration system (except 24" models)

Environmentally-safe R-134a refrigerant

High density, non-CFC polyurethane foamed-in-place insulation

#### **Exterior Cabinet Finishes**

Standard Models:

Wear resistant, textured baked enamel finish (black) **SS Models:** 

Stainless steel

All stainless steel countertop, heavy-duty galvanized interior side panels and top, stainless

side panels and top, stainless steel interior back and reinforced stainless steel floor

## Stainless steel reinforced threshold

#### Full length, extra large coil

Continuously cooled, 3" diameter beer columns with lever faucet, CO<sub>2</sub> pressure relief distributor and CO<sub>2</sub> tubing with clamps

Easily removable stainless steel drip grate with convenient front-mounted cleanout drainage hose (pan not removable)

Easily accessible and serviceable slide-out condensing unit

# Readily removable front, rear and side venting louvered grills

Automatic, energy-saving, non-electric condensate evaporator

Cylinder-keyed security lock (each door)

Magnetic snap-in door gasket (each door)

Interior light (except 24" models)

5" casters (24" models only)



Full length, extra large coil



Front breathing with removable front, rear and side louvered grills



Stainless steel reinforced threshold sill (hinged door models)



# Maximize the Number of Cool, Refreshing Drinks on Hand

Pass-thru Back Bar Coolers maximize better use of floor space on island bar layouts with access on both sides as either hinged or sliding glass doors.

- 6 sizes ranging from 24" 90"
- Front breathing air flow (intake/exhaust from the front)
- Standard or shallow depth
- Pass-thru models
- Display models, hinged or sliding glass doors
- Undercounter models
- Compressor on left (standard) or right (option)
- Optional food storage rated stainless steel interior (NSF-7)




BBC69S-SS-SGD Shallow depth, stainless steel, sliding glass doors, pass-thru




#### Overview of Back Bar Coolers


#### Widths (Undercounter models countertops have a 3/32" overlap on both sides)

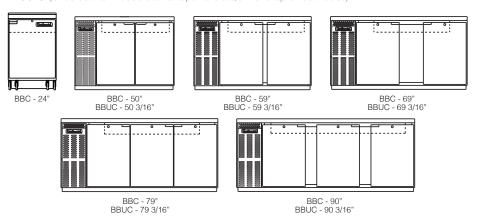


Depths - Hinged Doors (Shallow Depth or Pass-Thru not available on 24" models)



Depths - Sliding Glass Doors (Sliding Glass Doors not available on 24", 79" or 90" models)

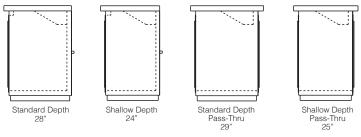

Door Styles (59" model shown below, all glass is double pane, tempered Low-e)

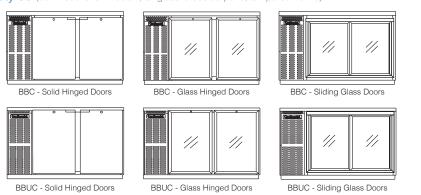

#### Standard Features

Performance-rated, **front breathing** refrigeration system
(except 24" models)

Environmentally-safe R-134a refrigerant

High density, non-CFC polyurethane foamed-in-place insulation

#### **Exterior Cabinet Finishes**

Standard Models:

Wear resistant, textured baked enamel finish (black)

SS Models:

Stainless steel

Heavy-duty galvanized interior side panels and top, stainless steel interior back and reinforced stainless steel floor

**BBC** - stainless steel countertop **BBUC** - aluminum subtop

# Stainless steel reinforced threshold

#### Full length, extra large coil

Heavy-duty, epoxy-coated steel shelves

Easily accessible and serviceable slide-out condensing unit

# Readily removable front, rear and side venting louvered grills

Automatic, energy-saving, non-electric condensate evaporator

Cylinder-keyed security lock (each hinged door only)

Magnetic snap-in door gasket (each door)

5" casters (24" models only)

#### **Interior lighting**

Interior light (solid door models, except 24") LED light (glass door models)



Heavy-duty bottle cap opener with removable cap catcher



Heavy-duty, epoxy-coated, adjustable steel wire storage bin dividers



Stainless steel slide lids









#### Cold, Frosty and Ready for Service

Bottle coolers have two available temperature options, 38°F, and for a deeper CHILL, 32°F, perfect for higher ambient establishments for that "cold beer" taste. Our Glass & Plate Chillers will maintain 0°F for fast frosting of wet or dry glasses.

#### **Bottle Coolers**

- 5 sizes ranging from 24" 95" Glass & Plate Chillers
- 3 sizes ranging from 24" 50"

Optional caster sizes, lid locks stainless steel interior









#### Overview of Bottle Cooler/Glass & Plate Chillers

#### Widths (CGC models have same widths, omit cap catcher)

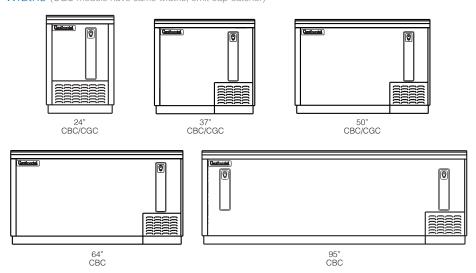

#### Depth



#### **Bottle Coolers Product Capacity**

MODEL	12 OZ. BOTTLES (CASES)	12 OZ. CANS (CASES)
CBC24	4 1/2	7 1/2
CBC37	12	18 1/2
CBC50	18	27
CBC64	25	37
CBC95	40	59

#### Glass & Plate Chillers Product Capacity

MODEL	5 IN. MUGS	10 OZ. STEINS
CGC24	95	90
CGC37	180	170
CGC50	250	250

#### **CBC/CGC** Temperatures

MODEL	Temperature
CBC Standard	38°F - 41°F
CBC-DC Deep Chill	32°F
CGC Glass & Plate	0°F

#### Standard Features

Performance-rated, refrigeration system

Front breathing (24" models only)

High density, non-CFC polyurethane foamed-in-place insulation

## **Exterior Cabinet Finishes Standard Models:**

Wear resistant, textured baked enamel finish (black)

SS Models: Stainless steel

All stainless steel countertop and slide lids, heavy-duty galvanized interior

#### Full length, extra large coil

Easily accessible and serviceable slide-out condensing unit

Front, rear and side venting louvers (except 24" models)

#### **BOTTLE COOLERS:**

Environmentally-safe R-134a refrigerant

# Heavy-duty, epoxy-coated adjustable steel wire storage bin dividers

Heavy-duty bottle cap opener with extra-capacity, removable cap catcher

Automatic, energy-saving non-electric condensate evaporator

Easily accessible, front-mounted cleanout drainage hose

#### **GLASS & PLATE CHILLERS:**

Heavy-duty sliding shelves

Environmentally-safe R-404A refrigerant

Automatic defrosting period is timer initiated and temperature terminated with automatic, energy-saving, non-electric condensate evaporator

STANDARD BLACK ENAMEL EXTERIOR	STAINLESS STEEL EXTERIOR	EXTERIOR DIMENSIONS INCHES W x D x H	CAPACITY BTU/HR*	H.P.	VOLTS	SHIP WEIGHT
Keg Coolers, S	standard Depth					
KC24	KC24-SS	24 x 31 1/8 x 38 1/2	1620	1/5	115-60-1	210
KC50	KC50-SS	50 x 29 1/4 x 36 3/4	1800	1/3	115-60-1	355
KC59	KC59-SS	59 x 29 1/4 x 36 3/4	2025	1/3	115-60-1	385
KC69	KC69-SS	69 x 29 1/4 x 36 3/4	2250	1/3	115-60-1	415
KC79	KC79-SS	79 x 29 1/4 x 36 3/4	2500	1/3	115-60-1	455
KC90	KC90-SS	90 x 29 1/4 x 36 3/4	2670	1/2	115-60-1	505
Keg Coolers, S	Shallow Depth					
KC50S	KC50S-SS	50 x 25 1/4 x 36 3/4	1800	1/3	115-60-1	355
KC59S	KC59S-SS	59 x 25 1/4 x 36 3/4	2025	1/3	115-60-1	385
KC69S	KC69S-SS	69 x 25 1/4 x 36 3/4	2250	1/3	115-60-1	415
KC79S	KC79S-SS	79 x 25 1/4 x 36 3/4	2500	1/3	115-60-1	455
KC90S	KC90S-SS	90 x 25 1/4 x 36 3/4	2670	1/2	115-60-1	505

<sup>\*</sup>BTU/HR Rating @ +25°F, 90°F ambient. 10 ft. cord and plug attached.

Pook Par Cool	ore Standard Dan	.th				
	ers, Standard Dep					
BBC24	BBC24-SS	24 x 31 1/8 x 38 1/2	1620	1/5	115-60-1	210
BBC50	BBC50-SS	50 x 29 1/4 x 36 3/4	1800	1/3	115-60-1	355
BBC59	BBC59-SS	59 x 29 1/4 x 36 3/4	2025	1/3	115-60-1	385
BBC69	BBC69-SS	69 x 29 1/4 x 36 3/4	2250	1/3	115-60-1	415
BBC79	BBC79-SS	79 x 29 1/4 x 36 3/4	2500	1/3	115-60-1	455
BBC90	BBC90-SS	90 x 29 1/4 x 36 3/4	2670	1/2	115-60-1	505
Back Bar Cool	ers, Shallow Depth	n				
BBC50S	BBC50S-SS	50 x 25 1/4 x 36 3/4	1800	1/3	115-60-1	355
BBC59S	BBC59S-SS	59 x 25 1/4 x 36 3/4	2025	1/3	115-60-1	385
BBC69S	BBC69S-SS	69 x 25 1/4 x 36 3/4	2250	1/3	115-60-1	415
BBC79S	BBC79S-SS	79 x 25 1/4 x 36 3/4	2500	1/3	115-60-1	455
BBC90S	BBC90S-SS	90 x 25 1/4 x 36 3/4	2670	1/2	115-60-1	505
Back Bar Cool	ers, Pass-Thru Sta	indard Depth				
BBC50-PT	BBC50-SS-PT	50 x 31 3/8 x 36 3/4	1800	1/3	115-60-1	355
BBC59-PT	BBC59-SS-PT	59 x 31 3/8 x 36 3/4	2025	1/3	115-60-1	385
BBC69-PT	BBC69-SS-PT	69 x 31 3/8 x 36 3/4	2250	1/3	115-60-1	415
BBC79-PT	BBC79-SS-PT	79 x 31 3/8 x 36 3/4	2500	1/3	115-60-1	455
BBC90-PT	BBC90-SS-PT	90 x 31 3/8 x 36 3/4	2670	1/2	115-60-1	505
Back Bar Cool	ers, Pass-Thru Sha	allow Depth				
BBC50S-PT	BBC50S-SS-PT	50 x 27 3/8 x 36 3/4	1800	1/3	115-60-1	355
BBC59S-PT	BBC59S-SS-PT	59 x 27 3/8 x 36 3/4	2025	1/3	115-60-1	385
BBC69S-PT	BBC69S-SS-PT	69 x 27 3/8 x 36 3/4	2250	1/3	115-60-1	415
BBC79S-PT	BBC79S-SS-PT	79 x 27 3/8 x 36 3/4	2500	1/3	115-60-1	455
BBC90S-PT	BBC90S-SS-PT	90 x 27 3/8 x 36 3/4	2670	1/2	115-60-1	505
				· ·		



STANDARD BLACK ENAMEL EXTERIOR	STAINLESS STEEL EXTERIOR	EXTERIOR DIMENSIONS INCHES W x D x H	CAPACITY BTU/HR*	H.P.	VOLTS	SHIP WEIGHT
Back Bar Displ	lay Coolers w/ Hir	nged Glass Doors, Star	ndard Depth			
BBC24-GD	BBC24-SS-GD	24 x 31 1/8 x 38 1/2	1620	1/5	115-60-1	220
BBC50-GD	BBC50-SS-GD	50 x 29 1/8 x 36 3/4	1800	1/3	115-60-1	365
BBC59-GD	BBC59-SS-GD	59 x 29 1/8 x 36 3/4	2025	1/3	115-60-1	395
BBC69-GD	BBC69-SS-GD	69 x 29 1/8 x 36 3/4	2250	1/3	115-60-1	425
BBC79-GD	BBC79-SS-GD	79 x 29 1/8 x 36 3/4	2500	1/3	115-60-1	465
BBC90-GD	BBC90-SS-GD	90 x 29 1/8 x 36 3/4	2670	1/2	115-60-1	515
Back Bar Displ	lay Coolers w/ Hir	nged Glass Doors, Sha	llow Depth			
BBC50S-GD	BBC50S-SS-GD	50 x 25 1/8 x 36 3/4	1800	1/3	115-60-1	365
BBC59S-GD	BBC59S-SS-GD	59 x 25 1/8 x 36 3/4	2025	1/3	115-60-1	395
BBC69S-GD	BBC69S-SS-GD	69 x 25 1/8 x 36 3/4	2250	1/3	115-60-1	425
BBC79S-GD	BBC79S-SS-GD	79 x 25 1/8 x 36 3/4	2500	1/3	115-60-1	465
BBC90S-GD	BBC90S-SS-GD	90 x 25 1/8 x 36 3/4	2670	1/2	115-60-1	515
Back Bar Displ	lay Coolers w/ Hir	nged Glass Doors, Pas	s-Thru Stand	ard De	pth	
BBC50-GD-PT	BBC50-SS-GD-PT	50 x 31 1/4 x 36 3/4	1800	1/3	115-60-1	365
BBC59-GD-PT	BBC59-SS-GD-PT	59 x 31 1/4 x 36 3/4	2025	1/3	115-60-1	395
BBC69-GD-PT	BBC69-SS-GD-PT	69 x 31 1/4 x 36 3/4	2250	1/3	115-60-1	425
BBC79-GD-PT	BBC79-SS-GD-PT	79 x 31 1/4 x 36 3/4	2500	1/3	115-60-1	465
BBC90-GD-PT	BBC90-SS-GD-PT	90 x 31 1/4 x 36 3/4	2670	1/2	115-60-1	515
Back Bar Displ	lay Coolers w/ Hir	nged Glass Doors, Pas	s-Thru Shallo	w Dep	th	
BBC50S-GD-PT	BBC50S-SS-GD-PT	50 x 27 1/4 x 36 3/4	1800	1/3	115-60-1	365
BBC59S-GD-PT	BBC59S-SS-GD-PT	59 x 27 1/4 x 36 3/4	2025	1/3	115-60-1	395
BBC69S-GD-PT	BBC69S-SS-GD-PT	69 x 27 1/4 x 36 3/4	2250	1/3	115-60-1	425
BBC79S-GD-PT	BBC79S-SS-GD-PT	79 x 27 1/4 x 36 3/4	2500	1/3	115-60-1	465
BBC90S-GD-PT	BBC90S-SS-GD-PT	90 x 27 1/4 x 36 3/4	2670	1/2	115-60-1	515
Back Bar Displ	lay Coolers w/ Sli	ding Glass Doors, Stan	dard Depth			
BBC50-SGD	BBC50-SS-SGD	50 x 28 x 36 3/4	1800	1/3	115-60-1	365
BBC59-SGD	BBC59-SS-SGD	59 x 28 x 36 3/4	2025	1/3	115-60-1	395
BBC69-SGD	BBC69-SS-SGD	69 x 28 x 36 3/4	2250	1/3	115-60-1	425
Back Bar Displ	lay Coolers w/ Sli	ding Glass Doors, Shal	low Depth			
BBC50S-SGD	BBC50S-SS-SGD	50 x 24 x 36 3/4	1800	1/3	115-60-1	365
BBC59S-SGD	BBC59S-SS-SGD	59 x 24 x 36 3/4	2025	1/3	115-60-1	395
BBC69S-SGD	BBC69S-SS-SGD	69 x 24 x 36 3/4	2250	1/3	115-60-1	425
Back Bar Displ	lay Coolers w/ Sli	ding Glass Doors, Pass	-Thru Standa	ard Der	oth	
BBC50-SGD-PT	BBC50-SS-SGD-PT	50 x 29 x 36 3/4	1800	1/3	115-60-1	365
BBC59-SGD-PT	BBC59-SS-SGD-PT	59 x 29 x 36 3/4	2025	1/3	115-60-1	395
BBC69-SGD-PT	BBC69-SS-SGD-PT	69 x 29 x 36 3/4	2250	1/3	115-60-1	425
Back Bar Displ	lay Coolers w/ Sli	ding Glass Doors, Pass	-Thru Shallov	w Dept	h	
BBC50S-SGD-PT	BBC50S-SS-SGD-PT	50 x 25 x 36 3/4	1800	1/3	115-60-1	365
BBC59S-SGD-PT	BBC59S-SS-SGD-PT	59 x 25 x 36 3/4	2025	1/3	115-60-1	395
BBC69S-SGD-PT	BBC69S-SS-SGD-PT	69 x 25 x 36 3/4	2250	1/3	115-60-1	425
BBC69S-SGD-PT	DBU095-55-5GD-P1	69 X 25 X 36 3/4	2250	1/3	115-6U-1	425

<sup>\*</sup>BTU/HR Rating @ +25°F, 90°F ambient. 10 ft. cord and plug attached.

STANDARD BLACK ENAMEL EXTERIOR	STAINLESS STEEL EXTERIOR	EXTERIOR DIMENSIONS INCHES W x D x H	CAPACITY BTU/HR*	H.P.	VOLTS	SHIP WEIGHT
Undercounter E	Back Bar Coolers	, Standard Depth				
BBUC50	BBUC50-SS	50 3/16 x 29 1/4 x 34 15/16	1800	1/3	115-60-1	365
BBUC59	BBUC59-SS	59 3/16 x 29 1/4 x 34 15/16	2025	1/3	115-60-1	395
BBUC69	BBUC69-SS	69 3/16 x 29 1/4 x 34 15/16	2250	1/3	115-60-1	425
BBUC79	BBUC79-SS	79 3/16 x 29 1/4 x 34 15/16	2500	1/3	115-60-1	465
BBUC90	BBUC90-SS	90 3/16 x 29 1/4 x 34 15/16	2670	1/2	115-60-1	515
Undercounter E	Back Bar Coolers	, Shallow Depth				
BBUC50S	BBUC50S-SS	50 3/16 x 25 1/4 x 34 15/16	1800	1/3	115-60-1	365
BBUC59S	BBUC59S-SS	59 3/16 x 25 1/4 x 34 15/16	2025	1/3	115-60-1	395
BBUC69S	BBUC69S-SS	69 3/16 x 25 1/4 x 34 15/16	2250	1/3	115-60-1	425
BBUC79S	BBUC79S-SS	79 3/16 x 25 1/4 x 34 15/16	2500	1/3	115-60-1	465
BBUC90S	BBUC90S-SS	90 3/16 x 25 1/4 x 34 15/16	2670	1/2	115-60-1	515
Undercounter [	Back Bar Coolers	, Pass-Thru Standard D	epth			
BBUC50-PT	BBUC50-SS-PT	50 3/16 x 31 3/8 x 34 15/16	1800	1/3	115-60-1	365
BBUC59-PT	BBUC59-SS-PT	59 3/16 x 31 3/8 x 34 15/16	2025	1/3	115-60-1	395
BBUC69-PT	BBUC69-SS-PT	69 3/16 x 31 3/8 x 34 15/16	2250	1/3	115-60-1	425
BBUC79-PT	BBUC79-SS-PT	79 3/16 x 31 3/8 x 34 15/16	2500	1/3	115-60-1	465
BBUC90-PT	BBUC90-SS-PT	90 3/16 x 31 3/8 x 34 15/16	2670	1/2	115-60-1	515
Undercounter E	Back Bar Coolers	, Pass-Thru Shallow De	pth			
BBUC50S-PT	BBUC50S-SS-PT	50 3/16 x 27 3/8 x 34 15/16	1800	1/3	115-60-1	365
BBUC59S-PT	BBUC59S-SS-PT	59 3/16 x 27 3/8 x 34 15/16	2025	1/3	115-60-1	395
BBUC69S-PT	BBUC69S-SS-PT	69 3/16 x 27 3/8 x 34 15/16	2250	1/3	115-60-1	425
BBUC79S-PT	BBUC79S-SS-PT	79 3/16 x 27 3/8 x 34 15/16	2500	1/3	115-60-1	465
BBUC90S-PT	BBUC90S-SS-PT	90 3/16 x 27 3/8 x 34 15/16	2670	1/2	115-60-1	515
Undercounter E	Back Bar Coolers	w/ Hinged Glass Doors	s, Standard [	Depth		
BBUC50-GD	BBUC50-SS-GD	50 3/16 x 29 1/8 x 34 15/16	1800	1/3	115-60-1	365
BBUC59-GD	BBUC59-SS-GD	59 3/16 x 29 1/8 x 34 15/16	2025	1/3	115-60-1	395
BBUC69-GD	BBUC69-SS-GD	69 3/16 x 29 1/8 x 34 15/16	2250	1/3	115-60-1	425
BBUC79-GD	BBUC79-SS-GD	79 3/16 x 29 1/8 x 34 15/16	2500	1/3	115-60-1	465
BBUC90-GD	BBUC90-SS-GD	90 3/16 x 29 1/8 x 34 15/16	2670	1/2	115-60-1	515
Undercounter [	Back Bar Coolers	w/ Hinged Glass Doors	s, Shallow De	epth		
BBUC50S-GD	BBUC50S-SS-GD	50 3/16 x 25 1/8 x 34 15/16	1800	1/3	115-60-1	365
BBUC59S-GD	BBUC59S-SS-GD	59 3/16 x 25 1/8 x 34 15/16	2025	1/3	115-60-1	395
BBUC69S-GD	BBUC69S-SS-GD	69 3/16 x 25 1/8 x 34 15/16	2250	1/3	115-60-1	425
BBUC79S-GD	BBUC79S-SS-GD	79 3/16 x 25 1/8 x 34 15/16	2500	1/3	115-60-1	465
BBUC90S-GD	BBUC90S-SS-GD	90 3/16 x 25 1/8 x 34 15/16	2670	1/2	115-60-1	515
Undercounter I	Back Bar Coolers	w/ Hinged Glass Doors	s, Pass-Thru	Standa	ard Depth	
BBUC50-GD-PT	BBUC50-SS-GD-PT	50 3/16 x 31 1/4 x 34 15/16	1800	1/3	115-60-1	365
BBUC59-GD-PT	BBUC59-SS-GD-PT	59 3/16 x 31 1/4 x 34 15/16	2025	1/3	115-60-1	395
BBUC69-GD-PT	BBUC69-SS-GD-PT	69 3/16 x 31 1/4 x 34 15/16	2250	1/3	115-60-1	425
BBUC79-GD-PT	BBUC79-SS-GD-PT	79 3/16 x 31 1/4 x 34 15/16	2500	1/3	115-60-1	465
BBUC90-GD-PT	BBUC90-SS-GD-PT	90 3/16 x 31 1/4 x 34 15/16	2670	1/2	115-60-1	515
BBUC79-GD BBUC90-GD Undercounter [ BBUC50S-GD BBUC59S-GD BBUC69S-GD BBUC79S-GD BBUC90S-GD Undercounter [ BBUC50-GD-PT BBUC59-GD-PT BBUC69-GD-PT BBUC79-GD-PT	BBUC79-SS-GD BBUC90-SS-GD BBUC50S-SS-GD BBUC59S-SS-GD BBUC69S-SS-GD BBUC79S-SS-GD BBUC90S-SS-GD BBUC90S-SS-GD-PT BBUC59-SS-GD-PT BBUC69-SS-GD-PT BBUC69-SS-GD-PT	79 3/16 x 29 1/8 x 34 15/16 90 3/16 x 29 1/8 x 34 15/16 <b>w/ Hinged Glass Doors</b> 50 3/16 x 25 1/8 x 34 15/16 59 3/16 x 25 1/8 x 34 15/16 69 3/16 x 25 1/8 x 34 15/16 79 3/16 x 25 1/8 x 34 15/16 90 3/16 x 25 1/8 x 34 15/16 <b>w/ Hinged Glass Doors</b> 50 3/16 x 31 1/4 x 34 15/16 69 3/16 x 31 1/4 x 34 15/16 69 3/16 x 31 1/4 x 34 15/16	2500 2670 8, Shallow De 1800 2025 2250 2500 2670 8, Pass-Thru 1800 2025 2250 2500	1/3 1/2 epth 1/3 1/3 1/3 1/3 1/3 1/3 1/3 1/3 1/3 1/3	115-60-1 115-60-1 115-60-1 115-60-1 115-60-1 115-60-1 115-60-1 115-60-1 115-60-1	465 515 365 395 425 465 515 365 395 425 465

<sup>\*</sup>BTU/HR Rating @ +25°F, 90°F ambient. 10 ft. cord and plug attached.



STANDARD BLACK ENAMEL EXTERIOR	STAINLESS STEEL EXTERIOR	EXTERIOR DIMENSIONS INCHES W x D x H	CAPACITY BTU/HR*	H.P.	VOLTS	SHIP WEIGHT
Undercounter E	Back Bar Coolers w	/ Hinged Glass Doors,	Pass-Thru S	Shallow	Depth	
BBUC50S-GD-PT	BBUC50S-SS-GD-PT	50 3/16 x 27 1/4 x 34 15/16	1800	1/3	115-60-1	365
BBUC59S-GD-PT	BBUC59S-SS-GD-PT	59 3/16 x 27 1/4 x 34 15/16	2025	1/3	115-60-1	395
BBUC69S-GD-PT	BBUC69S-SS-GD-PT	69 3/16 x 27 1/4 x 34 15/16	2250	1/3	115-60-1	425
BBUC79S-GD-PT	BBUC79S-SS-GD-PT	79 3/16 x 27 1/4 x 34 15/16	2500	1/3	115-60-1	465
BBUC90S-GD-PT	BBUC90S-SS-GD-PT	90 3/16 x 27 1/4 x 34 15/16	2670	1/2	115-60-1	515
Undercounter E	Back Bar Coolers w	/ Sliding Glass Doors, S	Standard De	epth		
BBUC50-SGD	BBUC50-SS-SGD	50 3/16 x 26 3/8 x 34 15/16	1800	1/3	115-60-1	365
BBUC59-SGD	BBUC59-SS-SGD	59 3/16 x 26 3/8 x 34 15/16	2025	1/3	115-60-1	395
BBUC69-SGD	BBUC69-SS-SGD	69 3/16 x 26 3/8 x 34 15/16	2250	1/3	115-60-1	425
Undercounter E	Back Bar Coolers w	/ Sliding Glass Doors, S	Shallow Dep	oth		
BBUC50S-SGD	BBUC50S-SS-SGD	50 3/16 x 22 3/8 x 34 15/16	1800	1/3	115-60-1	365
BBUC59S-SGD	BBUC59S-SS-SGD	59 3/16 x 22 3/8 x 34 15/16	2025	1/3	115-60-1	395
BBUC69S-SGD	BBUC69S-SS-SGD	69 3/16 x 22 3/8 x 34 15/16	2250	1/3	115-60-1	425
Undercounter E	Back Bar Coolers w	/ Sliding Glass Doors, F	Pass-Thru S	tandar	d Depth	
BBUC50-SGD-PT	BBUC50-SS-SGD-PT	50 3/16 x 25 13/16 x 34 15/16	1800	1/3	115-60-1	365
BBUC59-SGD-PT	BBUC59-SS-SGD-PT	59 3/16 x 25 13/16 x 34 15/16	2025	1/3	115-60-1	395
BBUC69-SGD-PT	BBUC69-SS-SGD-PT	69 3/16 x 25 13/16 x 34 15/16	2250	1/3	115-60-1	425
Undercounter E	Back Bar Coolers w	/ Sliding Glass Doors, F	Pass-Thru S	hallow	Depth	
BBUC50S-SGD-PT	BBUC50S-SS-SGD-PT	50 3/16 x 21 13/16 x 34 15/16	1800	1/3	115-60-1	365
BBUC59S-SGD-PT	BBUC59S-SS-SGD-PT	59 3/16 x 21 13/16 x 34 15/16	2025	1/3	115-60-1	395
BBUC69S-SGD-PT	BBUC69S-SS-SGD-PT	69 3/16 x 21 13/16 x 34 15/16	2250	1/3	115-60-1	425

<sup>\*</sup>BTU/HR Rating @ +25°F, 90°F ambient. 10 ft. cord and plug attached.

Bottle Coolers						
CBC24	CBC24-SS	24 x 28 1/2 x 34 3/4	1800	1/5	115-60-1	205
CBC37	CBC37-SS	37 x 28 1/2 x 33 1/2	1800	1/5	115-60-1	215
CBC50	CBC50-SS	50 x 28 1/2 x 33 1/2	1910	1/3	115-60-1	265
CBC64	CBC64-SS	64 x 28 1/2 x 33 1/2	2050	1/3	115-60-1	315
CBC95	CBC95-SS	95 x 28 1/2 x 33 1/2	3100	1/2	115-60-1	435
Deep Chill Bottl	le Coolers					
CBC24-DC	CBC24-SS-DC	24 x 28 1/2 x 34 3/4	1800	1/5	115-60-1	205
CBC37-DC	CBC37-SS-DC	37 x 28 1/2 x 33 1/2	1460	1/5	115-60-1	215
CBC50-DC	CBC50-SS-DC	50 x 28 1/2 x 33 1/2	1740	1/3	115-60-1	265
CBC64-DC	CBC64-SS-DC	64 x 28 1/2 x 33 1/2	1980	1/3	115-60-1	315
CBC95-DC	CBC95-SS-DC	95 x 28 1/2 x 33 1/2	2950	1/2	115-60-1	435
Glass & Plate C	Chillers					
CGC24	CGC24-SS	24 x 28 1/2 x 34 3/4	1800	1/4	115-60-1	215
CGC37	CGC37-SS	37 x 28 1/2 x 33 1/2	1130	1/3	115-60-1	225
CGC50	CGC50-SS	50 x 28 1/2 x 33 1/2	1350	1/3	115-60-1	285

<sup>\*</sup>BTU/HR Rating @ +25°F, 90°F ambient (Bottle Coolers); BTU/HR Rating @ -15°F, 90°F ambient (Glass/Plate Chillers). 10 ft. cord and plug attached.

#### Options & Accessories

#### Keg Coolers

Single, dual & triple angle faucets

Faucet lock

#### Keg Coolers & Back Bar

Epoxy-coated steel shelves (additional on BBC/BBUC)

Stainless steel shelves

Wine rack

Remote models

Expansion valve system

Casters or legs

Automatic, electric condensate evaporator (except 24" models)

Condensing unit left or right

#### **Back Bar Coolers**

Food storage rated stainless steel interior (NSF-7)

Sliding glass door lock

Stainless steel subtop (Undercounter models)

#### **Bottle Coolers**

Lid locks

Wire bin dividers



Faucet lock



Wine rack



Wire bin dividers



Lid lock

#### **Modification Suggestions**

Like our entire product line, Continental Refrigerator's Bar Equipment can be modified to meet your bar establishment needs. A few examples are shown below. Please consult factory for additional modifications.





#### Engineering, Manufacturing & Quality Control

#### Superior Built Back Bar Equipment

#### Designed to maintain NSF-7 temperatures in 100°F ambient.


Continental Refrigerator engineers and builds our Bar Equipment to meet the most stringent specifications demanded by consultants and service operators. All cabinets are constructed of top quality materials and components, attributing to their genuine ruggedness and durability. Bar Equipment is designed with enhancements to endure everyday use in harsh bar operating environments.

Prior to factory shipping, all models are performance-run tested for a minimum of 12 hours, providing a highly sophisticated temperature analysis recording, exclusive to each individual cabinet. This recording is then supplied, along with the unit's operation manual, for the customer. A final leak test, vibration check, noise level and visual examination is made by our quality control team, to assure a superior product is shipped from our factory.

#### Front Breathing Air Flow

Intake air is drawn through the louvers at the bottom half of the front grill, and then through the condenser coil. In cases where the rear of the unit is blocked, the air is forced to discharge through the holes at the top half of the front grill.





View of front breathing air flow on BBC/BBUC/KC models

#### Specialty Model BBUC24S-SS-D

Our compact, front breathing Cocktail Undercounter refrigerator packs alot of punch. Eliminates the need for storing messy open containers of cocktail mixes and fruits behind back bar units and bar counters, provides cleaner marketability of beer/wine in display units and potentially minimizes fruit fly problems. Ideally this unit is located under the front bar at blender stations serving a large volume of cocktail or smoothie drinks.

STAINLESS STEEL EXTERIOR	EXTERIOR DIMENSIONS INCHES W x D x H	CAPACITY BTU/HR*	H.P.	VOLTS	SHIP WEIGHT
BBUC24S-SS-D	24 x 25 7/8 x 39 1/2	1620	1/5	115-60-1	340

<sup>\*</sup>BTU/HR Rating @ +25°F, 90°F ambient. 10 ft. cord and plug attached.





Product design and specifications are subject to change without prior notice.



PANEL BENDER




LASER CUTTING



ROBOTIC PRESS BRAKE



POWER BRAKE

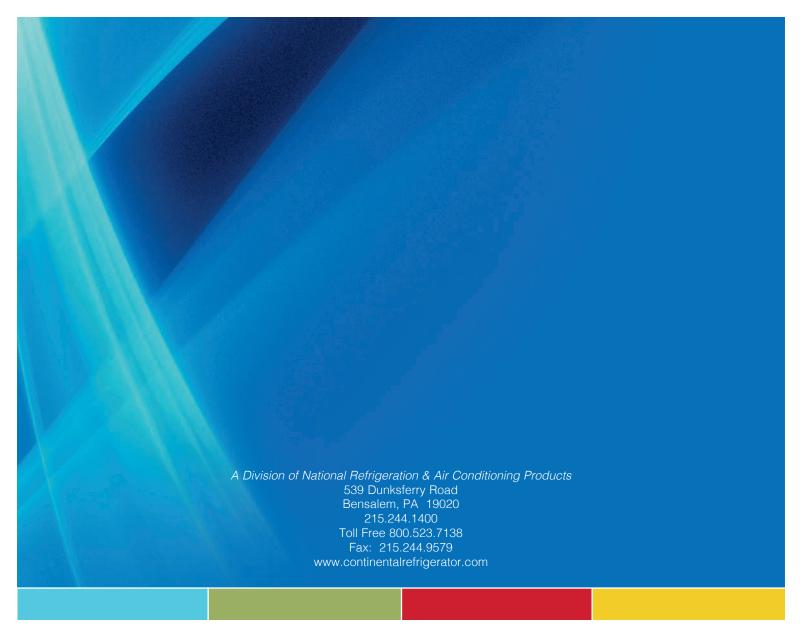





SCAN this code for more information on Continental Refrigerator products









#### INNOVATIVE DESIGNS FOR YOUR FOODSERVICE NEEDS



Continental Refrigerator has been an ENERGY STAR® Partner since 2001. For more information on ENERGY STAR, visit: www.energystar.gov.

