



T&S Brass Pet-Care Plumbing Specialty Products

For Grooming Pets and Cleaning/Sanitizing Cages, Kennels & Stables



T&S Quality Pet-Care Plumbing Products



RINSE UNITS

Wash and Rinse Products



PG-4DREV Lightweight Aluminum Spray Unit

- 4" (102 mm) centers deck mounted faucet
- 1/2" NPT female inlets
- Coiled hose and aluminum spray valve
- Lightweight spray valve for easy, all-day use



PG-35AV-CH Coiled Hose & Valve

- Lightweight aluminum handle with rubber grip and hold down clip
- 1/4" NPT male inlet
- Coiled polyurethane hose with maximum stretching length of 9 ft.

Replacement Parts

Model #	Description
EB-10K	Repair Kit
01359-45	Replacement Hose
PG-35AV	Aluminum Valve

PG-35AV-CH01 same as PG-35AV-CH except with female garden hose inlet (PG-0001)

PG-35AV-CH02 same as PG-35AV-CH except with 3/8" NPT female inlet (PG-0002)

PG-35AV-CH03 same as PG-35AV-CH except with 1/2" NPT female inlet (PG-0003)

PG-35AV-CH04 same as PG-35AV-CH except with 3/4" x 14 female aerator inlet (PG-0004)

PG-35AV-CH05 same as PG-35AV-CH except with 3/4" x 14 female inlet (052A)




PG-8WREV Lightweight Aluminum Spray Unit

- 8" (203 mm) centers wall mounted faucet
- 1/2" NPT female inlets
- Coiled hose and aluminum spray valve
- Lightweight spray valve for easy, all-day use



PG-8WSAV-08 Lightweight Aluminum Spray Unit


- 8" (203 mm) centers wall mounted faucet
- 1/2" NPT female inlets
- Coiled hose and aluminum spray valve
- Swivel adapter
- Vacuum breaker
- 8" (203 mm) add-on faucet
- Lightweight spray valve for easy, all-day use

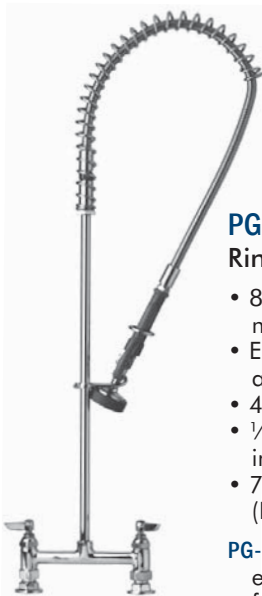

PG-0123 Overhead Wash and Rinse Unit

- 8" (203 mm) centers deck mounted faucet
- EB-0107 blue spray valve with automatic shut-off
- 40" high
- 1/2" NPT female eccentric flanged inlets
- 72" flexible stainless steel hose (B-0072-H)

PG-0123-B same as PG-0123 except with wall bracket for support

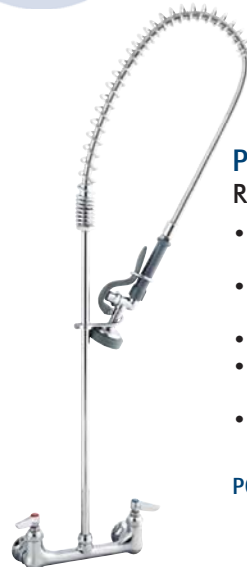

PG-0133 Overhead Wash and Rinse Unit

- 8" (203 mm) centers wall mounted faucet
- EB-0107 blue spray valve with automatic shutoff
- 34" high
- 1/2" NPT female eccentric flanged inlets
- 72" flexible stainless steel hose (B-0072-H)

PG-0133-B same as PG-0133 except with wall bracket for support

— Our Pedigree is Your Quality Assurance




RINSE UNITS

Wash and Rinse Products

P3-8WESV-08M Sink Faucet with Hose Spray

- 8" (203 mm) centers wall mounted faucet
- EB-0107-035 blue spray valve
- Add-on faucet with 8" swing nozzle and B-0199-01 aerator
- Swivel body with 96" flexible stainless steel hose (EB-0096-H)
- Hanger hook assembly (B-0166)
- 1/2" NPT female inlets

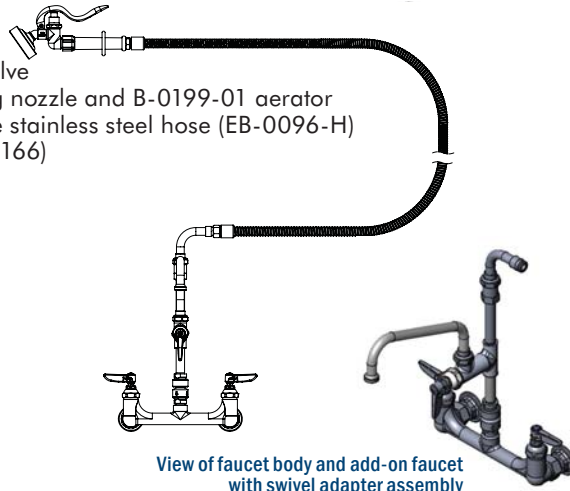

View of faucet body and add-on faucet with swivel adapter assembly



PG-2187 Overhead Wash and Rinse Unit

- 8" (203 mm) centers wall mounted faucet
- 46^{13/16}" high
- EB-0107 blue spray valve with finger hook
- Add-on faucet with 14" swing nozzle
- 1/2" NPT female eccentric flanged inlets
- Wall bracket for support
- 72" (1829 mm) PVC hose



B-2730 Swivel Base Faucet with Side Spray

- 9" spout
- Deck plate
- 4" handle
- Flexible supply hoses
- 4 ft. vinyl hose with hose guide

B-2730-LH same as B-2730 except with 6" long handle

B-2730-07 same as B-2730 except with 7 ft. hose

B-1171 Sink Faucet with Side Spray

- 4" (102 mm) centers deck mounted faucet
- Self-closing spray valve
- 8" (203 mm) swing nozzle
- 1" (25 mm) shanks
- Built-in diverter
- 4 ft. x 1.2 mm reinforced vinyl hose and hose guide

B-1172 same as B-1171 except with 8" centers

B-1172-02 same as B-1172 except with 7 ft. hose

B-2743 Single Lever Faucet with Side Spray

- Single hole deck mounted faucet
- Swivel gooseneck assembly with aerator
- Two 17" flexible supply hoses with 1/2" NPSM compression fittings
- Integral diverter for water flow through side spray or gooseneck



For more than half a century, **T&S Brass** has been setting the standard of excellence in the commercial plumbing business. Today, we manufacture a full line of quality grooming and pet-care plumbing products to make cleaning – and cleaning up after – even your toughest customers easy, safe, thorough and fast.

T&S pet-care products offer a wide range of tools and accessories designed to be versatile and withstand heavy use in kennels, grooming stations, veterinary clinics, boarding facilities and stables. **T&S** quality pet-care products are certified, always in stock and available worldwide. Plus, only **T&S** can get your order to you next day thanks to our exclusive **T&S Brass 24-Hour Quick Ship** program.

T&S delivers:

- Heavy-duty, commercial-grade products
- A wide range of features and options including sanitizing and interior/exterior capabilities
- Durable, corrosion-resistant stainless steel construction
- Easy to use, fully adjustable products
- Custom designed systems to meet your individual needs






RINSE UNITS

Wash and Rinse Products




B-1174 Deck Mounted Faucet with Spray

- 8" (203 mm) centers deck mounted faucet
- Side spray with 4 ft. hose (under counter) with hose deck flange
- 13¹¹/₁₆" high swivel gooseneck assembly with B-0199-01 aerator outlet
- Lever handles
- 1/2" NPT male shanks with 1/4" NPT tailpiece connections

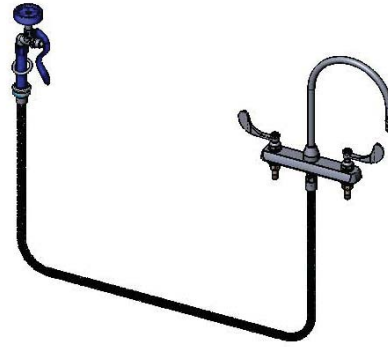

B-1176 Deck Mounted Faucet with 7' Spray

- 8" (203 mm) centers deck mounted faucet
- EB-0107 blue spray valve
- EB-0084-H flexible stainless steel hose (under counter) with hose deck flange
- 13⁵/₈" high swivel gooseneck assembly with aerator outlet (B-0199-01)
- Wrist action handles
- 1/2" NPT male shanks with 1/4" NPT tailpiece connections



B-1146-01 Wall Mounted Faucet

- 4" (102 mm) centers wall mounted faucet
- 5" (127 mm) high swivel gooseneck assembly with stream regulator outlet
- Lever handles
- 1/2" NPT male shanks with 1/4" NPT tailpiece connections



B-1146-04 Wall Mounted Faucet

- 4" (102 mm) centers wall mounted faucet
- 10⁵/₈" high swivel gooseneck assembly with aerator outlet (B-0199-01)
- Lever handles
- 1/2" NPT male shanks with 1/4" NPT tailpiece connections



HANDS-FREE FAUCETS

Equip Electronic Faucets



5EF-1D-DG Deck Mounted Electronic Faucet

- Single hole sensor faucet with aerator outlet
- Deck mounted with rigid gooseneck
- Hands-free operation



5EF-1D-DS Deck Mounted Electronic Faucet

- Single hole sensor faucet with aerator outlet
- Deck mounted, cast spout
- Hands-free operation



5EF-1D-WG Wall Mounted Electronic Faucet

- Single hole sensor faucet with aerator outlet
- Wall mounted with rigid gooseneck
- Hands-free operation

These electronic faucets include:

- AC/DC control module for ease of installation
- Temperature control mixing valve
- Inlet flex lines



HANDS-FREE FAUCETS Other Hands-Free Assemblies



B-0502 Double Pedal Valve, Floor Mounted

- Inlets on 2½" (64 mm) centers
- 1" (25 mm) from wall to center of inlets



B-0527 Swivel Gooseneck Spout

- Wall mounted swivel gooseneck
- ¾" NPT female inlet
- B-0199-01 aerator



B-0521 Rigid Gooseneck Spout

- Deck mounted 5½" (140 mm) rigid gooseneck
- B-0199-02 aerator
- 10¼" (260 mm) high from deck to top of gooseneck



HOSE REELS Epoxy Coated Steel Hose Reels

- Constructed of heavy-duty, corrosion-resistant epoxy coated stainless steel
- Long life and easy maintenance

These hose reels include:

- EB-0107 blue spray valve
- ¾" NPT female inlet
- Adjustable hose bumper
- Multi-fit bracket for wall, ceiling or under counter mounting
- Automatic retraction; pull hose to desired length, slight tug actuates retraction

Installation Note:

If mixing valve is used, check valves should be installed to prevent crossflow of water

B-7242-01 Hose Reel Open Model, 50 ft. Hose

- Open epoxy coated hose reel
- 50 ft. (15.25 m) hose of ¾" I.D.
- EB-0107 blue spray valve

B-7232-01 Hose Reel Open Model, 35 ft. Hose

- Open epoxy coated hose reel
- 35 ft. (10.7 m) hose of ¾" I.D.
- EB-0107 blue spray valve

B-7212-01 Hose Reel Open Model, 15 ft. Hose

- Open epoxy coated hose reel
- 15 ft. (4.5 m) hose of ¾" I.D.
- EB-0107 blue spray valve



HOSE REELS Stainless Steel Hose Reels

- Constructed of heavy-duty, corrosion-resistant stainless steel
- Long life and easy maintenance

These hose reels include:

- EB-0107 blue spray valve
- ¾" NPT female inlet
- Adjustable hose bumper
- Multi-fit bracket for wall, ceiling or under counter mounting
- Automatic retraction; pull hose to desired length, slight tug actuates retraction

Installation Note:

If mixing valve is used, check valves should be installed to prevent crossflow of water



B-7142-01 Hose Reel Open Model, 50 ft. Hose

- Open stainless steel hose reel
- 50 ft. (15.25 m) hose of ¾" I.D.
- EB-0107 blue spray valve

B-7132-01 Hose Reel Open Model, 35 ft. Hose

- Open stainless steel hose reel
- 35 ft. (10.7 m) hose of ¾" I.D.
- EB-0107 blue spray valve

B-7112-01 Hose Reel Open Model, 15 ft. Hose

- Open stainless steel hose reel
- 15 ft. (4.5 m) hose of ¾" I.D.
- EB-0107 blue spray valve



HOSE REELS Equip Hose Reels

- Constructed of heavy-duty, corrosion-resistant black epoxy coated steel
- Long life and easy maintenance

These Equip hose reels include:

- 5SV blue spray valve (not shown)
- 3/8" I.D. hose
- 3/8-18 NPT female inlet on reel
- 3/8-18 NPT male outlet on hose
- Hose is rated to 300 PSI with a maximum temperature of 176°F

Installation Note:

If mixing valve is used, check valves should be installed to prevent crossflow of water



5HR-232 Model



5HR-242 Model

5HR-232-01-GH Equip Hose Reel Open Model, 35 ft. Hose

- Open epoxy coated steel hose reel
- 35 ft. (10.7 m) hose of 3/8" I.D.
- 5SV blue spray valve (not shown)
- 3 ft. connector hose with garden hose adapter for optional connection to garden hose threaded hose bibbs

5HR-232-GH same as 5HR-232-01-GH except without 5SV blue spray valve

5HR-242-01-GH Equip Hose Reel Open Model, 50 ft. Hose

- Open epoxy coated steel hose reel
- 50 ft. (15.25 m) hose of 3/8" I.D.
- 5SV blue spray valve (not shown)
- 3 ft. connector hose with garden hose adapter for optional connection to garden hose threaded hose bibbs



HOSE REEL ACCESSORIES Spray Valves and Water Guns



MV-2522-04 Front Trigger Water Gun

- Heavy-duty stainless steel construction, blue
- Adjustable stream from solid to soft spray
- Excellent for cleaning jobs
- Controls water supply easily and efficiently
- Automatic shut-off conserves water
- Rated up to 200 PSI



5WG-1000-01 Equip Water Gun (at left)

- Water gun with quick-disconnect and 1/2" and 3/8" adapters

EB-2322 Extended Spray Wand

- EB-0107 spray valve with self-closing squeeze valve and extension for 21 3/4" total length
- 3/8" NPT female inlet
- Blue handle grip with hold-down ring
- Removable spray head



EB-0107 Spray Valve

- Blue spray valve
- 4.0+ GPM at 60 PSI flow
- Connects directly to hose
- Hold-down ring for constant water flow
- Shuts off when handle is released




5SV Equip Spray Valve

- For use on all 5HR-series hose reels
- 3/4-14 inlet
- 1.42 GPM at 60 PSI flow
- Includes spray valve and handle (not shown)



EB-0107-035 35° Angle Spray Valve

- Blue spray valve with 35° spray head
- 4.0+ GPM at 60 PSI flow
- Connects directly to hose
- Hold-down ring for constant water flow
- Shuts off when handle is released



MV-3516-25 Aluminum Rear Trigger Water Gun

- Aluminum water gun with 5/16" flow orifice
- Blue rubber cover
- Includes 1/2" NPT x 3/8" NPT female adapter (not shown)



HOSE REELS Hose Reel Brackets



G016636-45 Swing Bracket

- Epoxy coated steel
- Fits all 35 ft. (10.7 m) epoxy coated hose reels
- Mounting hardware not included



G016637-45 Swing Bracket

- Epoxy coated steel
- Fits all 50 ft. (15.25 m) epoxy coated hose reels
- Mounting hardware not included



OTHER MODELS And Accessories




B-0665-BSTR Service Sink Faucet with Top Wall Brace

- Rough chrome plated finish
- Built in screwdriver stops
- 8" (203 mm) centers adjustable from 7³/₄" (197 mm) to 8¹/₄" (210 mm)
- Vacuum breaker nozzle with ³/₄" garden hose thread and pail hook
- 2³/₈" (60 mm) clearance form wall to center line of faucet
- 8⁷/₈" (225 mm) from wall to center of outlet
- ¹/₂" NPT female inlets
- Includes spring checks



MV-0771-12N Mixing Valve

- Cast bronze valve, ¹/₂"
- Renewable disc
- Nickel alloy seats
- Two integral check valves
- ³/₄" cast bronze unions
- ³/₄" mixing valve



B-0963 Continuous Pressure Vacuum Breaker Assembly

- Designed for continuous pressure
- Furnished with quarter-turn ball valves
- ¹/₂" NPT inlet and outlet
- 001359-40 adapters available for ³/₈" NPT



MV-0771-12NW Washdown Station Assembly

- MV-0771 ¹/₂" mixing valve
- Rear trigger water gun
- Brass thermometer tee
- Stainless steel thermometer, temperature range from 50°F to 500°F
- 50 ft. (15.25 m) high pressure hose with brass couplings and swivel fittings
- Stainless steel hose rack



Our toll-free number, 1-800-476-4103, connects you to T&S Customer Service representatives. Their extensive product knowledge and hands-on training enable them to answer your questions, suggest smart solutions to your specific application needs and help you locate the T&S dealer nearest you.

You can also access information about these and other T&S products on our website, www.tsbrass.com



EYEWASH STATIONS Safety Equipment Models and Accessories



EW-7360B Wall Mounted Eye/Face Wash

- Twin Feather-Flo® ABS green plastic eyewash heads with built-in 2.5 gpm flow control
- Integral flip top dust covers automatically release with flow of water
- Round stainless steel receptor with chrome plated brass stay open ball valve, 1/2" IPS inlet and outlet, 1/4" IPS waste



EW-7611 Countertop Mounted Pull Down Eye/Face Wash Unit

- Polished chrome plated brass eye/face wash swings forward to activate
- Twin Feather-Flo® ABS green plastic heads with built in 2.5 gpm flow control
- Integral flip top dust covers automatically release with flow of water
- Can be mounted on either right or left side of sink
- Supply: 1/2" O.D. slip joint



EW-7651 Wall or Splashback Mounted Eye/Face Wash Unit

- Polished chrome plated brass single-action pull down to activate
- Twin Feather-Flo® ABS green plastic heads with built in 2.5 gpm flow control
- Supply: 1/2" O.D. slip joint

EW-8904 Counter Mounted Laboratory Eye/Face Wash Unit

- Countertop mounted eye/face and body spray
- Twin Feather-Flo® ABS plastic green heads positioned at 45° angle
- Controls water flow rate when flow pressure is between 30 and 90 psi
- Stay open squeeze lever valve with built in 6.25 gpm flow control assembly, 1/2" IPS inlet and 1/4" outlet
- Integral flip top dust covers automatically release with flow of water
- 8 ft. green pressure rated hose with 1/2" IPS inlet and outlet, chrome plated fitting and Noryl plastic deck flange that incorporates guiding key slot for proper positioning of spray


EW-7501 Nine-Gallon Portable Gravity Fed Eyewash Unit



- Nine-gallon capacity, high-density green polyethylene tank provides full pattern flushing at .4 gpm for a full 15 minutes
- Fold down eyewash arm has positive upper limit stop that covers and protects spray outlets when not in use
- Wide-fill opening for easy inspection, cleaning and filling
- ABS plastic eyewash heads with tripod anchor, stainless steel socket head cap screw and rubber gasket
- Includes wall bracket and eyewash preservative to permit storage of water for up to six months. Note: unit must be wall hung

EW-7612 Swing Away Eyewash Unit

- Countertop mounted polished chrome plated brass eye/face wash unit with swing-away feature to activate
- Mounted on right side of sink
- Twin polished chrome plated brass anti-surge Soft-Flo heads, 1/4" IPS, with 1.2 gpm flow control
- Controls water flow rate when flow pressure is between 30 and 90 psi
- Green polyethylene dust covers automatically release with flow of water
- Supply: 1/2" O.D. slip joint

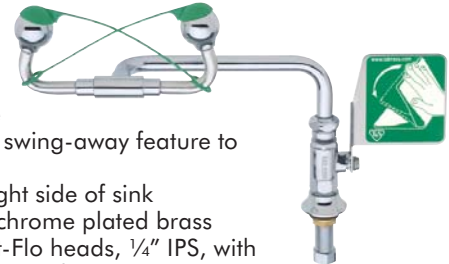

EW-7612LH Swing Away Eyewash Unit

- Same as EW-7612 except mounted on left side of sink



All Eyewash Stations include:

- Universal emergency eyewash sign
- "Test This Week" tag to record weekly testing record of equipment



RELIABILITY BUILT IN™

www.tsbrass.com

T&S Brass and Bronze Works, Inc.

Headquarters 2 Saddleback Cove • P.O. Box 1088 • Travelers Rest, SC 29690
Ph: 864-834-4102 • Fax: 864-834-3518

Western Sales and Distribution 709 E. Cochran Street Unit D and E • Simi Valley, CA 93065
Ph: 800-423-0150 • Ph: 805-527-7696 • Fax: 805-527-7661