

# Model LPG SERIES High Performance Outdoor Gas Grills

Project	
Item No	_
Quantity	



LPG60 Shown with optional equipment

### **APPLICATION**

The LPG outdoor catering Models offer high production outdoor grilling. All models are mounted on heavy duty casters for easy mobility over the toughest terrain. The modular design makes the appliance transportable to any event location. Many options and accessories are available to tailor your grill to match your menu selection and operational needs at any event in various settings.

### STANDARD FEATURES & ACCESSORIES

- V-shaped stainless steel radiant for each burner
- Front removable water tubs
- Standard duty top grid(s) 30" (76 cm) & 60" (152 cm)
- 1-1/4" Burners are 20,000 Btu energy output
- Regulator hose assembly with QCC1 connection (Two (2) on 60" models)
- Heavy duty 14 Ga. steel construction
- Removable support base for easy transport
- Heavy duty 6" swivel casters
- 8" (20.3 cm) stainless steel front service shelf
- Runner tube pilot system
- Pilot runner tube protection cover prevents clogging
- Individual burner controls for precision cooking

## MODELS Model Size and Gas Btu/Hr Rate


		<b>LPG30</b> 80Kbtu <b>LPG60</b> 160Kbtu		PG30 PG60		80Kbtu 160Kbtu	
	OF ■ □	PTIONS & ACCESS Heavy Duty Top Grids 15" (30" Models only)			AT ADI	DITIONAL CO	ST)
		Long Life Burner (11 G Hood(s) with Thermom	eter				
		15" (30" Models only) Slip on Service Shelves Side shelf		30" Rea		60" If	
		Steamer Option 15" Steamer set Steamer Pan Set		30" S	Stear	ner set	
		Half pan set MagiGriddle		Full	pan :	set	
		15" (30" Models only) Propane Fuel Tank(s) 20 Lb. vertical		30" 40 Ll	n Ve	rtical	
Э		Utility Handles Side mount (No side sh				er Tub	
		Top grid scraper (Heavy duty grids only) Water tub drain system					
		Stainless steel trim kit Side 20Lb. tank holder(s)					
		Outdoor vinyl cover 30" & 60" Wind guard (					

#### **APPROVALS**





### **Model LPG Series High Performance Outdoor Gas Grills**

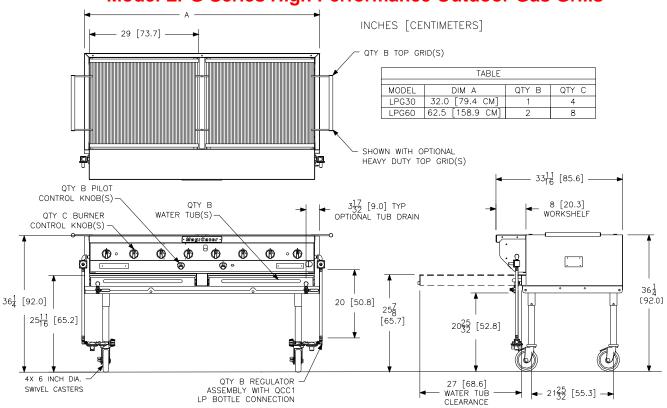

INDIVIDUAL CHARBROILER SPECIFICATIONS			
Model Size	LPG30	LPG60	
Gas BTU/HR	80,000	160,000	
(kW)	(23.4)	(46.8)	
Burners	4	8	
Top Grid	696 in <sup>2</sup>	1392 in <sup>2</sup>	
Cooking Area	$(4,483 \text{ cm}^2)$	(8,967cm <sup>2</sup> )	
Water Tubs	1	2	
Top Grid(s)	29 x 24" (73.5 x 61.0 cm)	(2X) 29 x 24" (73.5 x 61.0 cm)	
	SHIPPING INFORMATION (	Approximate)	
Model Size	LPG30	LPG60	
Shipping	215 lbs. (98 kg)	288 lbs. (131 kg)	
Shipping Crate	41" x 35" x 36" (11/cm x 89cm x 91cm)	71" x 37" x 25"	

INSTALLATION INFORMATION					
GAS PRESSURE REQUIREMENTS		GAS CONNECTION REQUIREMENTS			
	LP Gas	LPG30	LPG60		
Supply Pressure*	11 - 13" W.C (27.4 mbars/ 2.74 kPa)	One (1) LP supply assembly includes: (1) 3/8" NPT regulator (5"-12" WC) (1) 3/8" NPT LP 2 stage regulator (1) 3/8" LP rated gas hose	(1) 3/8" NPT regulator (5"-12" WC) (1) 3/8" NPT reg	Two (2) LP supply assembly includes: (1) 3/8" NPT regulator (5"-12" WC) (1) 3/8" NPT LP 2 stage regulator	
Burner			(1) 3/8" LP rated gas hose		
Pressure		IMPORTANT- This appliance is	s intended for outdoor use ONLY.		

(180cm x 94cm x 64cm)

38.0 ft<sup>3</sup> (1.1 m<sup>3</sup>)

(114cm x 89cm x 91cm)

29.9 ft3 (0.9 m3)

CLEARANCES (Can Not Be Mounted W/O Supplied Casters)				
Front min	Floor min.	Non-Combus	Charbroiler Combustion Area	
27"	21"	Sides min.	Rear min.	Do not block / restrict flue gases from venting from the
(68.6 cm)	(53.3 cm)	15" (38.1 cm)	8" (20.3 cm)	appliance or operate under canopies.

SHORT FORM SPECIFICATION

Provide MagiKitch'n model LPGxx radiant outdoor charbroiler mounted on heavy duty casters. Unit shall be gas heated and shall cook by means of gas burners. Unit shall be heavy duty 14 Ga. steel construction. Provide with independent gas burners. Individual burner controls shall be mounted every 7-1/4 inches for flexible use. Convertible design allows operator to quickly add additional accessories with out the use of tools in most instances. Provide Options and Accessories as follows:

LxWxH **Shipping Cube** 

This appliance is intended for use with LP gas bottles in accordance with NFPA regulations.